

ApeosPort-V

C7776 / C6676 / C5576 / C4476 / C3376 / C3374 / C2276



ApeosPort-V

C7776 / C6676 / C5576 / C4476 / C3376 / C3374 / C2276

Transform the way you work



The smartest technology investments do more than pay for themselves.

Ideally, they integrate and streamline multiple office processes, simplify complex tasks, and free up company resources so you can devote more energy to growing your business.

And in today's competitive environment, choosing the right technology provider means getting more than the latest bells and whistles. You need a complete solution that delivers efficiencies you never imagined – one that solves problems now, while also providing the framework you need to stay one step ahead of potential workflow obstacles.

You need more than a technology vendor. You need a partner who helps you find new ways to get more work done in less time.

	ApeosPort-V C7776	ApeosPort-V C6676	ApeosPort-V C5576	ApeosPort-V C4476	ApeosPort-V C3376	ApeosPort-V C3374	ApeosPort-V C2276
Copy Print							
Colour	70 ppm ^{*1}	65 ppm ^{*1}	50 ppm ^{*1}	45 ppm ^{*1}	35 ppm ^{*1}	30 ppm ^{*1}	25 ppm ^{*1}
B/W	70 ppm ^{*1}	65 ppm ^{*1}	55 ppm ^{*1}	45 ppm ^{*1}	35 ppm ^{*1}	30 ppm ^{*1}	25 ppm ^{*1}

Scan Colour, B/W : 80 ppm^{*2,3}
1 pass, 2 sided scanning : 150 ppm^{*2,3}

Fax Super G3 Supported



*1: A4 LEF

*2: Fuji Xerox Standard Paper (A4 LEF), 200 dpi, to Folder.

*3: With Duplex Automatic Document Feeder B1-PC. With Duplex Automatic Document Feeder B1-C, scanning speed is 70 pages/minute (colour and B/W), and 1 pass, 2 sided scanning is not available.

ApeosPort-V


C7776 / C6676 / C5576 / C4476 / C3376 / C3374 / C2276

Work wherever you are, however you like.

On the road, at home, dashing off to a client in the morning, or returning home in the evening. There's no doubt about it: Workstyles are changing.

To support people in all facets of their jobs, Fuji Xerox offers comprehensive mobile computing functions and keeps everyone connected via the Cloud.

We always look for ways to help bring out your best, wherever and however you work.

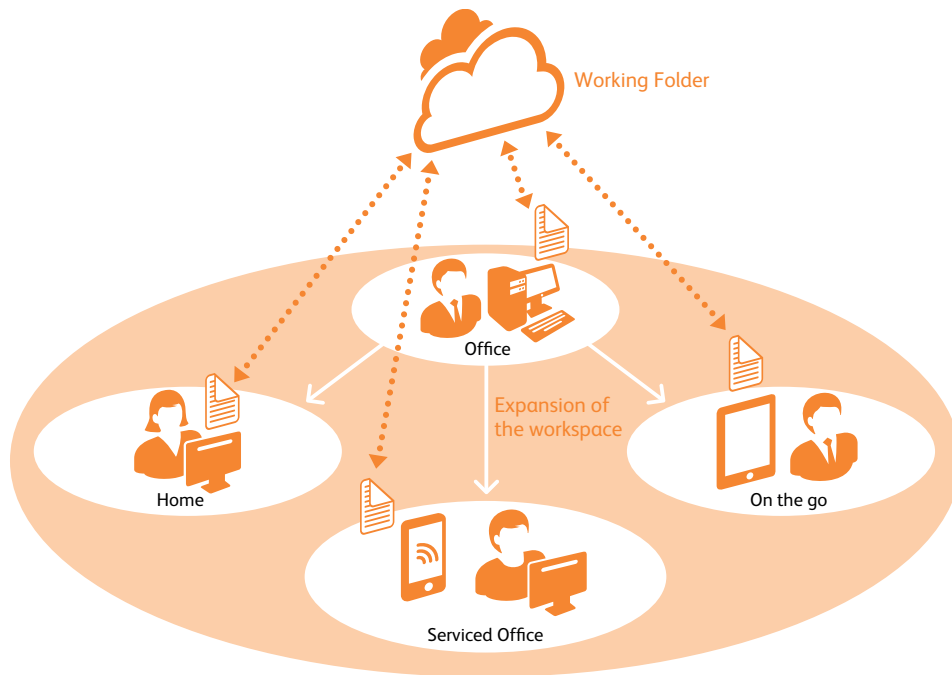

Smooth, impressive client presentations

Eliminate the hassle and worry of lugging around bulky, confidential documents. Working Folder, our Cloud-based document sharing service, keeps your documents secure and your briefcase light.

Use a PC or Fuji Xerox multifunction device to store documents in Working Folder, then access and view with a smart device while at your client's office.

You can also print from a tablet or smartphone to multifunction devices when out of the office via wireless LAN.

ApeosPort for simplified, secure document management

Featuring excellent scalability and customisability, ApeosPort boasts a galaxy of functions that also streamline management tasks and secure confidential information.

Users can now focus on work, assured of fast, easy access to shared information across the entire company.

- Link with an external authentication server
- Register frequently performed tasks for smoother workflows
- Encourage cost-cutting
- Restrict user permissions and limit printing/copying
- Log usage to monitor operations
- Monitor usage with UUID and image logs

* Requires optional ApeosWare Management Suite.

Smother application of information

Tablet device can also be used for printing.

You can also use your iPhone or iPad, or Android™ device to print via a wireless LAN access point. This ensures more smooth and speedy leverage of information.



The easy-to-use control

Panel can be set to use single-touch, easily recognisable icons for frequently used functions. Four different gestures — tap, double-tap, drag and flick — can be used to scroll and switch pages smoothly and quickly.



Flick

Touch the screen with your finger, and simply swipe the screen with your finger to scroll and switch pages.



Drag

Touch and hold a control such as buttons with your finger, and then slide your finger to move it.



Tap/Double-tap

Tap the screen (twice) with your finger to make a selection or decision.



Various File Formats and Processing Supported

Users can convert scanned documents and data to numerous file formats including TIFF, JPEG, DocuWorks document, PDF and XPS¹ before you send them by email. OCR processing can assist in searching for and compressing documents to reduce their size for e-mail communications², and password settings can also be set.

*1: Stands for XML Paper Specification.

*2: Optional.

Conversion to Editable Word and Excel® Files


Scanned data can also be converted to files in Word or Excel® format, and hardcopy documents can be converted into editable digital documents. The ApeosPort-V series devices can also convert tables and illustrations to objects suitable for reproduction with Word and Excel®.

* Optional.

An auxiliary function that allows you to reuse materials such as text, tables, shapes, and photos on paper documents. However, we cannot guarantee the accuracy when they are reused.



Output media

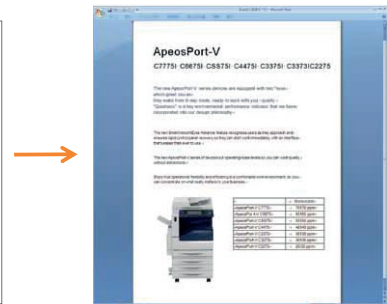

Word data

Remote Power Control (Power Off)

Devices located some distance from system administrators may be switched off remotely by PC. In large facilities such as a campus or factory building, this function can reduce the time and labour required to walk to every device and switch it off individually.

A Wider Product Lineup for Effective Deployment and Management

This series is noted for high environmental performance thanks to advanced technologies such as an IH-Fuser and LED print head, and now provide 25 to 70 sheets/minute. Thus users can share common operability and consumables among several machines, if introduced. The machines, having instantaneous force to wake up from Sleep Mode in 3.1 seconds*, will answer the requirements for high-speed processing and strategic deployment.

* For ApeosPort-V C3376/C3374/C2276. 10.5 seconds for ApeosPort-V C5576/C4476. 14.0 seconds for ApeosPort-V C7776/C6676.

Duplex Automatic Document Feeder Offering High Productivity

Duplex Automatic Document Feeder on the machine is equipped with the "one path duplex scanning feature" to scan both sides of a duplex document at one time, realizing high speed scanning of 150 pages/minute* for both colour and monochrome originals. Besides holding up to 130 sheets of documents, the light weight design, weighing only 11 kg, assists smooth operation for users to open/close it. This provides offices with high productivity.

* With Automatic Document Feeder B1-PC.160 pages/minute when Quiet Mode is set to OFF.

Support for banner printing

You can now print beautiful posters in your office with the ApeosPort-V series of devices. They are capable of handling paper sizes up to 320 mm x 1200 mm, opening up a range of new print and copy possibilities.

* Printable area is 305 x 1194 mm.

* Long-paper printing is not supported when a finisher is attached.

* Only supports PCL driver and Windows® of Adobe® PostScript® 3™.



Light and Heavy Paper Support

The ApeosPort-V series can handle a wider range of paper weights than ever before. The standard paper tray supports weights from 52 gsm up to 300 gsm*. This provides opportunities to create a broad range of business documents and reports, as well as marketing materials such as journals and POS material.

* Documents may not be printed correctly depending on usage conditions.

Hole punched paper and envelope are also supported

Punched paper suitable for filing is supported. Also, no wrinkles occur during printing on envelope of up to 70 gsm, which is usually used.

Print in different environments

The ApeosPort-V series can be shared and printing can be performed in two independent network environments. With two network ports, you can maximise the use of the multifunction device while maintaining tight security of having separate network.

* Optional.

* Print function only. Supported protocol: TCP/IP (lpd, Port9100) only.

Easy printing wherever you are

Print Utility for iOS / Android

This free Fuji Xerox application lets you output web pages, pictures, DocuWorks and PDF documents¹, and import scanned documents to mobile devices. You can configure it to print N-up and duplex. Server-less On-demand printing² is also available by assigning authentication information. Additionally, the application is supported by standard printing frameworks on Android™ OS 4.4 or later. More applications allow output using Print Utility for Android.

* Print Utility can be downloaded for free from the App Store (iOS) or Google Play™(Android).

*1: Outputting DocuWorks and PDF documents requires DocuWorks Viewer Light for iPhone/iPad or DocuWorks Viewer Light for Android.

*2: Optional.

Google Cloud Print

By registering the multi-function device with Google Cloud Print, you can output documents via the cloud from Android™ devices, Chromebook™ and computers. Giving permission to office visitors provides them with a printing environment without connecting to your Intranet.

* Google Cloud Print is a web printing service from Google.



Wi-Fi Direct®

Wi-Fi Direct® can be used with a wireless LAN adaptor. You can connect personal mobile devices directly to the multi-function device then print. Using a wireless LAN access point allows you to separate connections from business mobile devices and computers on an Intranet.

* Optional.

AirPrint

Supports AirPrint, iOS and OS X standard print functions. You can output e-mails and documents created with Apple applications, including Safari, Map, Numbers, Pages and Keynote, and Microsoft applications such as Word, Excel® and PowerPoint®.



Mopria™ Print

You can output on a Mopria-certified device from Mopria Print Service* installed on mobile devices without installing different printing applications of models or manufacturers.

* Mopria Print Service can be downloaded for free from Google Play™. (Android™ 4.4 or later)



Advanced functionality and easy to use

Working Closely With You

The new ApeosPort-V series automatically exits from Sleep mode as users approach the device. Two "eyes", using a real-time proximity camera and a pyroelectric heat sensor, detect when a user is approaching and wakes it from Sleep mode so it is ready to use immediately. This clever technology simplifies operational processes and saves both time and energy. What's more, a face recognition camera can tell more accurately who the user is, and prepare the device to suit their particular applications.



Enhanced Convenience with Facial Recognition

Smart WelcomEyes Advance 2* is able to discern users as they approach the device and detect when they want to use it. It can also recognise user faces and apply that information for fast, simple authentication. * Optional.

Simpler Scanning Operation

Enjoy improved scanning usability and operation without the trouble of manual and complex setup



1 This technology uses an infrared pyroelectric sensor to monitor thermal changes in the vicinity of the device, to detect a person approaching.


2 The user detection camera verifies human motion, such as the direction their toes are pointing, to determine whether the person wishes to use the device.

3 It also user authentication through face recognition making authentication simple and fast.
* The local authentication mode must be enabled.

Easier scanning for personal use

ScanAuto determines paper orientation and simplex/duplex for you. Destinations for scanned data can be selected from the send history. Moreover, when authenticated, your e-mail address will be automatically input. Skip blank pages and auto-orientation can also be selected.

* ScanAuto is pre-installed, but must be configured before use.



Easy to scan and save file for individual work

Scan Delivery* provides automatic operation to name a file in accordance with pre-defined rule and save scanned data directly in specified folder instead of using PC to save them. You can improve operating efficiency in routine scanning task.

* Optional.




Image Recognition through a Reputable Processor

The technology of human/face recognition camera uses an Image Recognition through a Reputable Processor for vehicle-mounted cameras. Rapid recognition of users enables the device to minimise power consumption, and ensure that it is ready to use immediately.

Linkage with Remote Authentication Servers

ApeosPort is capable to perform authentication management with user account information from authentication server. This reduces administrative burden without requiring administrators to configure authentication settings for each machine. Available services and colours can be restricted on a user basis. By adding a built-in IC Card Reader* to the device, IC Card authentication can be used. This feature can also provide access control to specific functions on the device, enhancing both security management and user convenience.

* Optional. IC Card Reader cannot be used concurrently with Smart WelcomEyes Advance 2.



Built-in IC Card Reader


IC Card Reader IC Card Reader for HID Prox



External IC Card Reader

Working Folder

Store scanned documents directly to Working Folder, automatically upload received faxes and send upload notifications by e-mail. Stored documents can be viewed and edited on PCs or smart devices using a web browser or DocuWorks. The enhanced security and management functions allow all information to be securely shared.

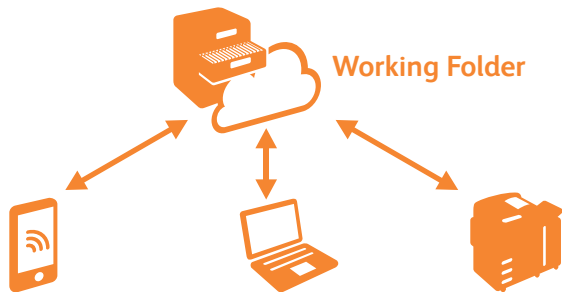

With a smart device

- View, register and download documents
- Upload pictures and videos

With a web browser or DocuWorks Desk

- Search, drag and drop

With a multifunction device


- Auto-register received faxes
- Register scanned documents
- Download and print

* This function requires the Working Folder Service contract.

Printable from Any Machine on Demand

After a job has been sent to the device, users can choose the "Server-less On-demand" feature to print it from any machine on the network on demand, simply by logging on to the machine. Even if the selected device is in use, users can choose their job from another machine and print it. No dedicated server is required for this feature. It is also possible to use up to five devices in this way by grouping them – for example, by floor or workgroup.

* Optional.

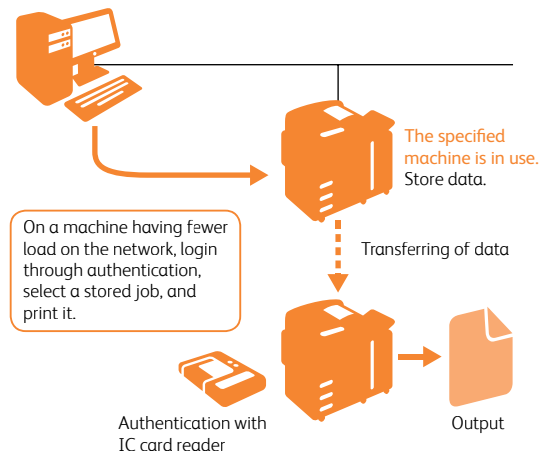

Leverage of Timely Information with Paperless Fax

[Receiving]

Received fax documents can be sorted into different device folders by dial number or G3ID. After viewing the thumbnails, users can choose to print only designated documents. As soon as fax documents are received in a folder, they can also be sent as a fax, printed, sent as an e-mail, transferred via FTP, and transferred via SMB automatically.



[Sending]

Direct Fax (sending fax directly from PC) can also be used. Sent fax documents can also be saved as PDF and sent as e-mail attachments.

[Reject]

Allows administrators to block incoming faxes from certain numbers and anonymous numbers.

Offices Using Five or More Devices

By utilising ApeosWare Management Suite*, administrators can distribute print drivers, restrict use of the device to certain accounts, gather print counts, improve running efficiency, automate distribution processes and manage job logs. These applications make it a simple task to plan and manage usage of the device, while maintaining full security.

* Software sold separately.

User- and environment-friendly

Real Green Solutions

Fuji Xerox is committed to real, measurable green solutions in office environments. These can be achieved while at the same time improving user convenience and efficiency during operations.



"Smart Energy Management" for Specific Power Use

The new ApeosPort-V series uses Smart Energy Management to power only the functions requested by users. This reduces power consumption and CO₂ emissions. To minimise noise, the scanning and output devices do not generate noise when not operating.

Fast Wake-up of Control Panel

Fuji Xerox has achieved a fast wake-up by improving the software initialisation process. Thanks to Smart Energy Management, users can adjust settings while the device wakes up. The machine responds almost immediately on demand.

Adoption of LED to Save Energy Without Compromising Quality

Fuji Xerox has utilised LED technology for the exposure unit for low power consumption and a smaller print head, which can image at 1200 x 2400 dpi. It also uses fewer moving parts, so it is quieter during operation.

Quiet Operation

Fuji Xerox continually addresses the problem of noise in the business environment. We have introduced advanced technologies to our "Quiet Flagship Model" such as the Duplex Automatic Document Feeder*, incorporating new image processing.

* Duplex Automatic Document Feeder B1-PC

Excellent TEC Value

The ApeosPort-V series has achieved 1.0 kWh⁻¹ for TEC value², conforming to International ENERGY STAR® Program standards and reducing power consumption.

*1: For ApeosPort-V C2276 Model.

*2: Value measured by the test defined in International ENERGY STAR® Program.


TEC value	Model	Value (kWh)
	ApeosPort-V C2276	1.0 kWh
	ApeosPort-V C3374	1.3 kWh
	ApeosPort-V C3376	1.4 kWh
	ApeosPort-V C4476	2.1 kWh
	ApeosPort-V C5576	2.7 kWh
	ApeosPort-V C6676	3.5 kWh
	ApeosPort-V C7776	3.7 kWh

Extra Functionality in Finishing



A “Z Fold Half sheet” folding capability is now available.

Further Finishing Functions with Introduction of C3 Finisher that supports “Tri-fold”




Stapling

Stapling multiple pages documents, such as meeting materials into sets, is available.



Punch

A hole punch process can be used for filing documents in binders.




Saddle Staple

This Single Fold and stapling process is ideal for creating catalogues and booklets.



Z Fold Half sheet*

Z Fold Half sheet is a useful method to combine A3 documents into A4 size.



Tri-fold*

The C-fold is useful when creating materials enclosed in envelopes.

* Folder Unit CD1 is required.

	Finisher A1	Finisher B1 + Booklet Maker Unit for Finisher-B1	C3 Finisher	C3 Finisher with Booklet Maker	C3 Finisher with Booklet Maker + Folder Unit CD1
Stapling thickness	50 sheets* ¹	50 sheets	50 or 65 sheets* ²	50 or 65 sheets* ²	50 or 65 sheets* ^{2,3}
Punch	—	2/4 hole punch* ⁴ or 2/3 hole punch* ⁵	2/4 hole punch* ⁶ or 2/3 hole punch* ⁷	2/4 hole punch* ⁶ or 2/3 hole punch* ⁷	2/4 hole punch* ⁶ or 2/3 hole punch* ⁷
Saddle Staple	—	○* ⁸	—	○	○
Single Fold	—	○* ⁸	—	○	○
Tri-fold	—	—	—	—	○* ⁹
Z Fold Half sheet	—	—	—	—	○* ⁹
Tray capacity* ¹⁰	Output tray	—	500 sheets	500 sheets	500 sheets
	Finisher tray	500 sheets	2000 sheets	3000 sheets	1500 sheets

*1: A4 size. Max. 30 sheets with B4 or larger. Single stapling (front/angled) only.

*2: C3 Finisher Staple Unit 65 Sheets is required.

*3: Finisher capacity decreases when Z-fold half sheets are mixed.

*4: 2/4 Hole Punch Kit for Finisher-B1 is required.

*5: US 2/3 Hole Punch Kit for Finisher-B1 is required.

*6: Punch Unit 2H/4H is required.

*7: Punch Unit US 2H/3H is required.

*8: Booklet Maker Unit for Finisher-B1 is required. For the features of Saddle Staple or Single Fold, Finisher B1 does not perform folding but perform scoring.

*9: Folder Unit CD1 is required.

*10: 64 gsm paper

Note: C3 Finisher or C3 Finisher with Booklet Maker requires Transport Unit H1.

Note: Finisher A1 can only be attached to ApeosPort-V C3376, C3374 and C2276.

Note: Finisher B1 can only be attached to ApeosPort-V C5576, C4476, C3376, C3374 and C2276.

Selectable Output Trays

When Inner Output Tray ① or Side Tray ② is attached, tray can be specified per job, i.e. Copy, Print, or Fax. If your organization has several fax lines, tray can also be assigned for each line.



High-Capacity Feed

The new ApeosPort-V series uses Tandem Tray ③, which can accommodate up to 3090 sheets. In addition, an optional High Capacity Feeder which can hold up to 2030 sheets* of A4-size media (one tray) ④ is available. It supports large-volume output demands.

* 80 gsm paper.



Specifications of ApeosPort-V C7776 / C6676 / C5576 / C4476 / C3376 / C3374 / C2276

Basic Specifications/Copy Function

Item	ApeosPort-V C7776	ApeosPort-V C6676	ApeosPort-V C5576	ApeosPort-V C4476	ApeosPort-V C3376	ApeosPort-V C3374	ApeosPort-V C2276	
Type	Console							
Memory capacity	4 GB (Max: 4 GB)							
Hard disk capacity ¹	160 GB or larger (Usable space: 128 GB)							
Colour Capability	Full Colour							
Scan Resolution	600×600 dpi							
Printing Resolution	1200 x 2400 dpi (High Resolution Photo) 600 x 600 dpi (Text / Text-Photo / Photo / Map)							
Warm-up Time	30 seconds or less, 24 seconds or less if the main power is on (At room temperature 23°C)							
Original Size	Maximum of 297 x 432 mm (A3, 11 x 17") for both Sheet and Book							
Paper Size	Max	SRA3 (320 x 450 mm), 12 x 18" (305 x 457 mm), A3 [12 x 19" (305 x 483 mm) when using Bypass Tray]						
	Min	A5 [Postcard (100 x 148 mm) and Quadrate NO.3 Envelope (120 x 235 mm) when using Bypass Tray]						
	Image loss width	Lead Edge 4.0 mm, Trail Edge 2.0 mm, Right & Left Edges 2.0 mm						
Paper Weight ²	Paper Tray	52 to 300 gsm						
	Bypass Tray	52 to 300 gsm						
First Copy Output Time	B/W ³	3.3 sec.	3.3 sec.	3.7 sec.	4.4 sec.	4.9 sec.	4.9 sec.	6.6 sec.
	Colour ⁴	4.1 sec.	4.1 sec.	5.2 sec.	5.7 sec.	6.4 sec.	6.4 sec.	8.7 sec.
Continuous Copy Speed ⁵	A4 LEF / B5 LEF	B/W: 70 ppm Colour: 70 ppm	B/W: 65 ppm Colour: 65 ppm	B/W: 55 ppm Colour: 50 ppm	B/W: 45 ppm Colour: 45 ppm	B/W: 35 ppm Colour: 35 ppm	B/W: 30 ppm Colour: 30 ppm	B/W: 25 ppm Colour: 25 ppm
	A4 / B5	B/W: 50 ppm Colour: 50 ppm	B/W: 46 ppm Colour: 46 ppm	B/W: 39 ppm Colour: 36 ppm	B/W: 32 ppm Colour: 32 ppm	B/W: 27 ppm Colour: 27 ppm	B/W: 23 ppm Colour: 23 ppm	B/W: 19 ppm Colour: 19 ppm
	B4	B/W: 40 ppm Colour: 40 ppm	B/W: 37 ppm Colour: 37 ppm	B/W: 32 ppm Colour: 29 ppm	B/W: 26 ppm Colour: 26 ppm	B/W: 23 ppm Colour: 23 ppm	B/W: 20 ppm Colour: 20 ppm	B/W: 16 ppm Colour: 16 ppm
	A3	B/W: 35 ppm Colour: 35 ppm	B/W: 32 ppm Colour: 32 ppm	B/W: 27 ppm Colour: 25 ppm	B/W: 22 ppm Colour: 22 ppm	B/W: 20 ppm Colour: 20 ppm	B/W: 17 ppm Colour: 17 ppm	B/W: 14 ppm Colour: 14 ppm
	Paper Tray Capacity ⁶	Standard	500 sheets x 2-tray + 867 sheets + 1133 sheets + Bypass Tray 90 sheets					
	Optional	HCF B1: 2030 sheets						
	Max	5120 sheets (Standard + HCF B1)						
Output Tray Capacity ⁷	Upper Center: 250 sheets (A4 LEF), Lower Center: 250 sheets (A4 LEF)							
Power Supply	AC220-240 V +/- 10 %, 10 A, 50/60 Hz common							
Maximum Power Consumption	[C7776 / C6676]	2.2 kW or less (AC220 V +/- 10 %) 2.4 kW or less (AC240 V +/- 10 %) Sleep Mode: 1.3 W or less (AC220 V +/- 10 %) Ready Mode: 119 W or less (AC220 V +/- 10 %)						
	[C5576 / C4476]	2.2 kW or less (AC220 V +/- 10 %) 2.4 kW or less (AC240 V +/- 10 %) Sleep Mode: 1.3 W or less (AC220 V +/- 10 %) Ready Mode: 105 W or less (AC220 V +/- 10 %)						
	[C3376 / C3374 / C2276]	2.2 kW or less (AC220 V +/- 10 %) 2.4 kW or less (AC240 V +/- 10 %) Sleep Mode: 1.3 W or less (AC220 V +/- 10 %) Ready Mode: 55 W or less (AC220 V +/- 10 %)						
	[C7776 / C6676 / C5576 / C4476 / C3376 / C3374 / C2276]	W 640 x D 699 x H 1143 mm (when Duplex Automatic Document Feeder B1-PC is installed) [C3376 / C3374 / C2276] W 640 x D 699 x H 1128 mm (when Duplex Automatic Document Feeder B1-C is installed)						
	Weight ⁸	148 kg	148 kg	144 kg	144 kg	140 kg	140 kg	140 kg

¹ The Storage Hard disk capacity is not totally available for customers.

² It is recommended to use Fuji Xerox recommended paper. Correct print output may not be possible depending on the requirement.

³ A4 LEF / Monochrome priority mode.

⁴ A4 LEF / Colour priority mode.

⁵ The speed may be reduced due to the image quality adjustment.

⁶ 80 gsm paper.

⁷ 64 gsm paper.

⁸ Excluding Toner Cartridge.

Print Function

Item	Description	
Type	Built-in type	
Continuous Print Speed ¹	Same as the Basic Specifications / Copy Function	
Print Resolution	600 x 600 dpi, 1200 x 1200 dpi, 1200 x 2400 dpi	
Page Description Language	Standard	PCL5 / PCL6
	Optional	Adobe® PostScript® 3™
Supported Operating System	Standard (PCL Driver)	Windows® 10 (32bit), Windows® 10 (64bit), Windows® 8.1 (32bit), Windows® 8.1 (64bit), Windows® 8 (32bit), Windows® 8 (64bit), Windows® 7 (32bit), Windows® 7 (64bit), Windows Vista® (32bit), Windows Vista® (64bit), Windows Server® 2012 R2 (64bit), Windows Server® 2012 (64bit), Windows Server® 2008 R2 (64bit), Windows Server® 2008 (32bit), Windows Server® 2008 (64bit), Windows Server® 2003 (32bit), Windows Server® 2003 (64bit)
	Standard (Mac OS X Driver)	OS X 10.10/10.9/10.8, Mac OS X 10.7/10.6/10.5
	Optional (Adobe® PostScript® 3™ Driver)	Windows® 10 (32bit), Windows® 10 (64bit), Windows® 8.1 (32bit), Windows® 8.1 (64bit), Windows® 8 (32bit), Windows® 8 (64bit), Windows® 7 (32bit), Windows® 7 (64bit), Windows Vista® (32bit), Windows Vista® (64bit), Windows Server® 2012 R2 (64bit), Windows Server® 2012 (64bit), Windows Server® 2008 R2 (64bit), Windows Server® 2008 (32bit), Windows Server® 2008 (64bit), Windows Server® 2003 (32bit), Windows Server® 2003 (64bit) OS X 10.10/10.9/10.8, Mac OS X 10.7/10.6/10.5
Interface	Standard	Ethernet 100BASE-TX / 10BASE-T, USB2.0
	Optional	Ethernet 1000BASE-T, Bidirectional Parallel (IEEE1284-B)

¹ The speed may be reduced due to the image quality adjustment. The printing speed may be reduced depending on the document.

Scan Function

Item	Description	
Type	Colour Scanner	
Scan Resolution	600 x 600 dpi, 400 x 400 dpi, 300 x 300 dpi, 200 x 200 dpi	
Scan Speed ¹	Duplex Automatic Document Feeder B1-C	[C3376 / C3374 / C2276] B/W: 70 ppm, Colour: 70 ppm
	Duplex Automatic Document Feeder B1-PC ²	B/W: 80 ppm, Colour: 80 ppm (1 pass, 2 sided scanning: B/W: 150 ppm ³ , Colour: 150 ppm ³) [Fuji Xerox Standard Paper (A4 LEF), 200dpi, to Folder.]
Interface	Standard	Ethernet 100BASE-TX / 10BASE-T
	Optional	Ethernet 1000BASE-T

¹ Scan to Email performance is dependent on the SMTP server provided. Fuji Xerox recommends the use of a reliable SMTP service provider to ensure smooth performance for Scan to Email.

² The scanning speed varies depending on the documents.

³ Simplex scanning speed of Duplex Automatic Document Feeder B1-PC is reduced when Paper Security Function is enabled.

⁴ 160 ppm for both B/W and colour when Quiet Mode is disabled. This setting can be changed to suit the customer's usage.

Duplex Automatic Document Feeder B1-C

Item	ApeosPort-V C3376	ApeosPort-V C3374	ApeosPort-V C2276
Original Size	Max: A3, 11 x 17" Min: A5 ¹		
Paper Weight	38 to 128 gsm (In Duplex: 50 to 128 gsm)		
Capacity ²	110 sheets		
Feeding Speed	B/W: 35 ppm Colour: 35 ppm	B/W: 30 ppm Colour: 30 ppm	B/W: 25 ppm Colour: 25 ppm
	(A4 LEF Simplex)		

¹ The minimum custom size is 125 x 85 mm.

² 64 gsm paper.

Duplex Automatic Document Feeder B1-PC (Optional)

Item	ApeosPort-V C7776	ApeosPort-V C6676	ApeosPort-V C5576	ApeosPort-V C4476	ApeosPort-V C3376	ApeosPort-V C3374	ApeosPort-V C2276
Original Size	Max: A3, 11 x 17" Min: A5 ¹						
Paper Weight	38 to 128 gsm (In Duplex: 50 to 128 gsm)						
Capacity ²	130 sheets						
Feeding Speed	B/W: 70 ppm Colour: 70 ppm	B/W: 65 ppm Colour: 65 ppm	B/W: 55 ppm Colour: 50 ppm	B/W: 45 ppm Colour: 45 ppm	B/W: 35 ppm Colour: 35 ppm	B/W: 30 ppm Colour: 30 ppm	B/W: 25 ppm Colour: 25 ppm
	(A4 LEF Simplex)						
Dimensions	W 560 x D 498 x H 140 mm						
Weight	11 kg						

¹ The minimum custom size is 125 x 85 mm.

² 64 gsm paper.

Fax Function (Optional)

Item	Description
Original Size	Max: A3, 11 x 17"; Long document (Longest 600 mm)
Recording Paper Size	Max: A3, 11 x 17" Min: A5
Transmission Time	2 seconds and more but fewer than 3 seconds ¹
Transmission Mode	ITU-T G3
Applicable Lines	Telephone subscriber line, PBX, Fax communication (PSTN), Maximum 3 ports ² (G3-3 ports)

¹ When A4 size document with approximately 700 characters is transmitted in standard image-quality (8 x 3.85 lines / mm) and in high-speed mode (28.8 kbps or faster, JBIG). Only indicates the time for transmitting the image information and does not include the communication control time. The total communication time will vary depending on the contents of the document, the type of machine receiving the fax, and line condition.

² No. of FAX lines is up to 2 ports. Port refers to number of channels for FAX.

HCF B1 (Optional)

Item	Description
Paper Size	A4 LEF, Letter LEF, B5 LEF
Paper Weight	55 to 216 gsm
Feeding Capacity / Number of Tray ¹	2030 sheets x 1-tray
Dimensions	W 389 x D 610 x H 380 mm
Weight	29 kg

¹ 80 gsm paper.

Side Tray

Item	Description
Paper Capacity ¹	100 sheets
Dimensions	W 353 x D 469 x H 198 mm

¹ 64 gsm paper.

Finisher-A1 (Optional)

Item	Description
Type	Sort (Offset available) / Stack (Offset available)
Paper Size	Max: A3, 11 x 17" Min: Postcard (100 x 148 mm)
Paper Weight ¹	52 to 220 gsm
Paper Capacity ²	Finishing Tray [Without Stapling] A4: 500 sheets, B4: 250 sheets, A3 or larger: 200 sheets, Mixed Size Stacking ³ : 250 sheets [With Stapling] 30 sets
Staple	Capacity A4: 50 sheets (90 gsm or less) B4 or larger: 30 sheets (90 gsm or less)
	Paper Size Max: A3, 11 x 17" Min: B5 LEF
	Position Single stapling
Dimensions	W 559 x D 448 x H 246 mm
Weight	12 kg

Note The unit cannot be installed on ApeosPort-V C7776/C6676/C5576/C4476.

¹ Documents may not be printed correctly depending on usage conditions. (52 to 55 gsm)

² 64 gsm paper.

³ When larger size sheets are stacked on top of smaller size sheets.

Finisher-B1 (Optional)

Item	Description
Type	Sort (Offset available) / Stack (Offset available)
Paper Size ¹	Max: A3, 11 x 17" Min: B5 LEF
Paper Weight ²	52 to 220 gsm
Paper Capacity ³	[Without Stapling] A4: 2000 sheets, B4 or larger: 1000 sheets, Mixed Size Stacking ⁴ : 300 sheets [With Stapling] A4: 100 sets or 1000 sheets ⁵ , B4 or larger: 75 sets or 750 sheets [With Booklet Finishing ⁶] 50 sets or 600 sheets [With Scoring ⁶] 500 sheets
Staple	Capacity 50 sheets (90 gsm or less)
	Paper Size Max: A3, 11 x 17" Min: B5 LEF
	Position Single stapling, Dual stapling
Punch ⁷	Number of Holes 2-hole / 4-hole punch or 2-hole / 3-hole punch (US Specifications)
	Paper Size A3, 11 x 17", B4, A4 ⁸ , A4 LEF, Letter ⁸ , Letter LEF, B5 LEF
	Paper Weight 55 to 200 gsm
Booklet Finishing ⁸	Capacity Saddle Staple: 15 sheets, Scoring: 5 sheets
	Paper Size Max: A3, 11 x 17" Min: A4, Letter
	Paper Weight Saddle Staple: 64 to 80 gsm, Scoring: 64 to 105 gsm
Dimensions ⁹	W 620 x D 552 x H 987 mm With Booklet Finisher: W 620 x D 597 x H 1057 mm
Weight	28 kg With Booklet Finisher: 37 kg

Note The unit cannot be installed on ApeosPort-V C7776/C6676.

¹ Paper size is smaller than B5, and larger than A3, 11 x 17" can be output from the Center Tray.

² Documents may not be printed correctly depending on usage conditions. (52 to 55 gsm)

³ 64 gsm paper.

⁴ When larger size sheets are stacked on top of smaller size sheets.

⁵ 75 sets or 750 sheets with dual stapling.

⁶ The Booklet Finishing function requires the optional Finisher-B1 Booklet unit. After a job with the Booklet Finishing function specified has been output, the next job may not be delivered until the sheets are removed from the output tray. Also, if larger size sheets are stacked on top of smaller size sheets after a job with the Booklet Finishing function specified has been run, the next job may not be delivered until the sheets are removed from the output tray.

⁷ The Punch function requires the optional Finisher-B1 Punch unit for 2-hole / 4-hole punch or Finisher-B1 Punch unit for 2-hole / 3-hole punch (US Specifications).

⁸ 3-hole punch is not applicable.

⁹ Inner connector within the body is excluded.

C3 Finisher / C3 Finisher with Booklet Maker (Optional)

Item	C3 Finisher	C3 Finisher with Booklet Maker
Type	Output Tray Sort / Stack	Sort (Offset available) / Stack (Offset available)
	Finishing Tray	Sort (Offset available) / Stack (Offset available)
	Booklet Tray	Sort / Stack
Paper Size ¹	Output Tray Max: 12 x 19" (305 x 483 mm) Min: Postcard (100 x 148 mm)	Output Tray Max: 12 x 19" (305 x 483 mm) Min: B5 LEF
	Finishing Tray Max: 12 x 19" (305 x 483 mm) Min: B5 LEF	Finishing Tray Max: 12 x 19" (305 x 483 mm) Min: B5 LEF
	Booklet Tray	Booklet Tray Max: 12 x 18" (305 x 457 mm) Min: B5
Paper Weight ²	Output Tray 52 to 300 gsm	Output Tray 52 to 300 gsm
	Finishing Tray 52 to 300 gsm	Finishing Tray 52 to 300 gsm
	Booklet Tray	Booklet Tray 60 to 105 gsm ³
Paper Capacity ⁴	Output Tray 500 sheets (A4)	Output Tray 500 sheets (A4)
	Finishing Tray [Without Stapling] A4: 3000 sheets, B4 or larger: 1500 sheets, Mixed Size Stacking ⁵ : 300 sheets [With Stapling] A4: 200 sets or 3000 sheets, B4 or larger: 100 sets or 1500 sheets, Mixed Size Stacking ⁵ : 70 sets or 200 sheets	Finishing Tray [Without Stapling] A4: 1500 sheets, B4 or larger: 1500 sheets, Mixed Size Stacking ⁵ : 300 sheets [With Stapling] A4: 200 sets or 1500 sheets, B4 or larger: 100 sets or 1500 sheets, Mixed Size Stacking ⁵ : 70 sets or 200 sheets
	Booklet Tray	Booklet Tray 20 sets ⁶
Staple	Capacity 50 sheets (90 gsm or less) ⁷	Capacity 50 sheets (90 gsm or less) ⁷
	Paper Size Max: A3, 11 x 17" Min: B5 LEF	Paper Size Max: A3, 11 x 17" Min: B5 LEF
	Position Single stapling, Dual stapling	Position Single stapling, Dual stapling
Punch ⁸	Number of Holes 2-hole / 4-hole punch or 2-hole / 3-hole punch (US Specifications)	Number of Holes 2-hole / 4-hole punch or 2-hole / 3-hole punch (US Specifications)
	Paper Size A3, 11 x 17", B4, A4 ⁹ , A4 LEF, Letter ⁹ , Letter LEF, B5 LEF, 7.25 x 10.5" (184 x 267 mm), 8 x 10" (203 x 254 mm), 16K (194 x 267 mm), Cover A4 (223 x 297 mm), 9 x 11" (229 x 279 mm), 215 x 315 mm, 8.5 x 13" (216 x 330 mm), Legal, 11 x 15" (279 x 381 mm), 8K (267 x 388 mm)	Paper Size A3, 11 x 17", B4, A4 ⁹ , A4 LEF, Letter ⁹ , Letter LEF, B5 LEF, 7.25 x 10.5" (184 x 267 mm), 8 x 10" (203 x 254 mm), 16K (194 x 267 mm), Cover A4 (223 x 297 mm), 9 x 11" (229 x 279 mm), 215 x 315 mm, 8.5 x 13" (216 x 330 mm), Legal, 11 x 15" (279 x 381 mm), 8K (267 x 388 mm)
	Paper Weight 52 to 200 gsm	Paper Weight 52 to 200 gsm
Booklet Finishing	Capacity	Capacity Saddle Staple: 16 sheets ¹⁰ Middle-Fold: 5 sheets Single Fold: 1 sheet
	Paper Size	Paper Size Max: SRA3 (320 x 450 mm), 12 x 18" (305 x 457 mm) Min: B5
	Paper Weight	Paper Weight Saddle Staple: 60 to 105 gsm ¹¹⁻¹² Middle-Fold: 60 to 105 gsm ¹¹⁻¹² Single Fold: 60 to 105 gsm
Dimensions ¹³	W 730 x D 589 x H 1056 mm When Folder Unit CD1 is installed: W 965 x D 726 x H 1056 mm	W 790 x D 589 x H 1056 mm When Folder Unit CD1 is installed: W 1025 x D 726 x H 1056 mm
Weight	44 kg When Folder Unit CD1 is installed: 98 kg	61 kg When Folder Unit CD1 is installed: 115 kg

Note C3 Finisher or C3 Finisher with Booklet Maker requires Transport Unit H1.

¹ Paper less than B5 size is delivered from the Center Tray.

² Documents may not be printed correctly depending on usage conditions. (52 to 55 gsm)

³ Cover sheets can be up to 256 gsm.

⁴ 64 gsm paper.

⁵ When larger size sheets are stacked on top of smaller size sheets.

⁶ When the output paper size is the same.

⁷ Up to 65 sheets can be stapled when the optional C3 Finisher Staple Unit 65 Sheets is installed. However, depending on the paper type, incorrect stapling such as uneven edge alignment of sets may occur.

⁸ Optional.

⁹ 3-hole punch is not applicable.

¹⁰ Saddle Staple capacity varies depending on how heavy the cover is. Booklet may not be tightly closed depending on the size or type of the paper.

¹¹ Covers can be up to 256 gsm (Thick Paper 2) for saddle staple during printing.

¹² Printed covers can be up to 169 gsm (Thick Paper 1) for middle-fold or saddle staple during copying, while blank covers can be up to 256 gsm (Thick Paper 2).

¹³ Inner connector within the body is excluded.

Folder Unit CD1 (Optional)

Item	Description
Z Fold	Paper Size A3, 11 x 17", B4
Half Sheet	Paper Weight 60 to 90 gsm
Tri-fold	Paper Size A4, Letter
	Paper Weight 60 to 90 gsm
	Paper Capacity ¹ 40 sheets
Power Supply ²	AC220-240 V +/- 10 %, 0.6 A, 50/60 Hz common
Maximum Power Consumption	144 W or less (AC220-240 V +/- 10 %)
Dimensions	W 232 x D 726 x H 991 mm
Weight	53 kg

¹ 64 gsm paper.

² Power supply separate from the main unit is required.

Notes

- 1) If the storage media (such as hard disk drives) of the base unit fail, loss of received data, accumulated data, registered setting data, etc. may occur. In no event shall Fuji Xerox be liable for any damages whatsoever arising from loss of data.
- 2) Functional spare parts will be available for at least 7 years after the product is no longer manufactured.
- 3) The product specifications, appearance and other details in this brochure are subject to change without notice for improvements.